
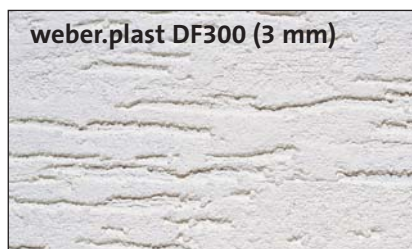
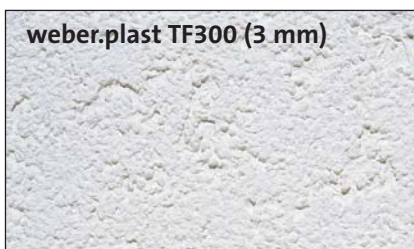
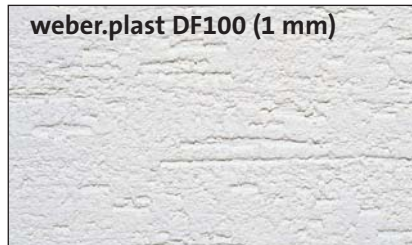


Acrylic-based, composite,
decorative finishes

weber.plast TF and DF

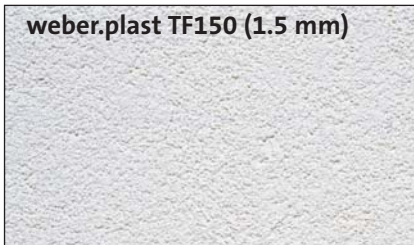

About this product

weber.plast TF and **weber.plast DF** are acrylic based, composite, decorative finishes, pre-mixed and ready to apply in wet form.

Technical data					
1 As a decorative textured finish for application onto either a single coat or a 2-coat float finished render					
2 As a decorative textured finish for external wall systems – weber.therm XM and XL					
Insulation Board	Reinforcement	Fixing	1st Coat	2nd Coat	Finish
weber.therm XM				<i>Optional</i>	
MFS	Meshcloth	Mechanical	weber.rend LAC	weber.rend PTC	weber PR310 and weber.plast TF or weber.plast DF
EPS		weber.rend LAC			
PHS		Mechanical or weber.rend LAC			
weber.therm XL					
MFS	Ferritic stainless lath	Mechanical	weber.rend MFU	weber.rend TTC or weber.rend PTC	weber PR310 and weber.plast TF or weber.plast DF
PHS			weber.rend PUC		
Coated EPS			weber.rend PUC or weber.rend TUC		
3 As a decorative textured finish for multi-coat render systems – weber.rend stipple or weber.rend IF, lath and render					
First layer	Reinforcement option	Fixing	1st Coat	2nd Coat	Finish
Membrane or weber.rend stipple or Keyed surface	Ferritic stainless lath N/A	Mechanical N/A	weber.rend PUC weber.rend PUC weber.rend PUC or weber.rend TUC	weber.rend TTC or weber.rend PTC	weber PR 310 and weber.plast TF or weber.plast DF

Uses

- Decorative, textured finish to a prepared surface.
 - Excellent performance gives a reliable solution for harsh or exposed conditions
 - Thin coat application is suitable for decoration of lightweight backgrounds
- weber.plast TF** has an even textured finish (1.5 mm and 3 mm aggregate content)
- weber.plast DF** has a drag texture finish – horizontal, vertical or swirled effect (1 mm and 3 mm aggregate content)
- When used in strict accordance with manufacturer's instructions and within an appropriate system, **Weber** finishes will have a minimum life of 10 years

Constraints

The quality of application of this material depends on suitable operative skills and product familiarity.

Restrictions on weather conditions during application and curing must be respected.

Sound trade practices and printed instructions must be followed.

Good access and appropriate protection must be provided.

Features and benefits

- Factory batched and ready to use
- Excellent all-round weather performance
- Durable and resilient
- Technical support from a Quality Assured company
- Established track record in varying climatic conditions
- Forms part of a number of approved insulation systems



weber.plast TF and DF

Application

weber.plast TF and **weber.plast DF** are wet pre-mixed materials contained in 15kg sealed polythene buckets. They are applied to prepared surfaces on to a tinted primer.

Prime the prepared surface using **weber PR310** applied by brush or spray. Ensure complete coverage of wall to be treated to prevent 'grinning through' of the background. Primer is of low viscosity and easily applied. Check batch numbers and colours of material required to complete working area. Stir well in buckets and make minor adjustments to workability with a little water, thoroughly mixed in.

Apply **weber.plast TF** or **weber.plast DF** with a steel float and hawk to work area. Use a thin plastic float to finish **weber.plast TF** and a wooden or plastic float to create drag or swirl effects with **weber.plast DF**.

Evenness of cover and texture are of paramount importance. Agree acceptable finished appearance on a sample area with architect or supervising officer before proceeding with large-scale application. Maintain a steady flow of application and keep a wet edge on all incomplete areas.

weber.plast TF and **weber.plast DF** are synthetic materials, therefore weather conditions for applying and drying are critical. Dry weather may not be enough if the humidity is high and the drying potential of the atmosphere is low. A dry atmosphere which can be foreseen for about 36 hours is preferred to effect initial curing and prevent wash-off. Otherwise proper weather protection for the work may be necessary.

Synthetic mixes can stain and are difficult to remove so protect vulnerable areas thoroughly and wear protective clothing, particularly gloves.

Good practice

Do not apply:

- If frost is forecast within 24 hours of use
- In damp/wet conditions
- In temperatures below 5°C or above 30°C
- On elevations in direct sunlight or where the substrate is hot

Colours

weber.plast TF and **weber.plast DF** are available in a wide range of colours. Specifiers should consult the NCS Colour Chart on the **Weber** website www.netweber.co.uk.

Final colour selection must be made against an actual sample. **Weber** will not accept responsibility for colours chosen from any source other than an actual sample.

Colour samples are freely and readily available from **Weber**.

Packaging

weber.plast TF and **weber.plast DF** are packaged in 15kg sealed polythene buckets with batch code, description and colour (where appropriate) on the side.

Coverage

	Coverage
weber PR310	0.25 litres/m ²
weber.plast TF150 (1.5 mm)	2.8 kg/m ²
weber.plast TF300 (3 mm)	6 kg/m ²
weber.plast DF100 (1 mm)	1.5 kg/m ²
weber.plast DF300 (3 mm)	3.8 kg/m ²

Storage and shelf life

Wet pre-mixed materials must be stored frost-free and protected from direct sunlight and extreme heat.

To prevent ingress of air, buckets should be stacked no more than 2 high, and where a central support is used, to a maximum height of 4.

When stored under these conditions, the shelf life of the product is 12 months from the date of manufacture.

Technical services

Weber's Customer Services Department has a team of experienced advisors available to provide on-site advice both at the specification stage and during application. Detailed specifications can be provided for specific projects or more general works. Site visits and on-site demonstrations can be arranged on request.

Technical helpline

Tel: 01525 722137
Fax: 01525 718988

Sales enquiries

Weber products are distributed throughout the UK through selected stockists and distributors. Please contact the relevant Customer Services Team below for all product orders and enquiries.

England and Wales
Tel: 08703 330070
Fax: 01525 718988

Scotland, Northern Ireland, Isle of Man, Republic of Ireland
Tel: 028 9335 2999
Fax: 028 9332 3232

Saint-Gobain Weber Ltd

Dickens House, Enterprise Way, Maulden Road, Flitwick, Bedford MK45 5BY, UK
Tel: 08703 330070 Fax: (01525) 718988 e-mail: mail@netweber.co.uk
Web: www.netweber.co.uk

Health and safety

Essentially not hazardous.
Not harmful during normal use.
After contact with skin, wash immediately with plenty of water.
In case of contact with eyes, rinse immediately with plenty of water and seek medical advice.
Keep out of the reach of children.

For further information, please request the Material Safety Data Sheet for this product.

To the best of our knowledge and belief, this information is true and accurate, but as conditions of use and any labour involved are beyond our control, the end user must satisfy himself by prior testing that the product is suitable for his specific application, and no responsibility can be accepted, or any warranty given by our Representatives, Agents or Distributors. Products are sold subject to our Standard Conditions of Sale and the end user should ensure that he has consulted our latest literature.